




**Dajulong No.3**  
复合商用卷材地板

**DajuLong**<sup>®</sup>  
大巨龙弹性地板



# Dajulong No.3


规格: 2.0mm × 2.0m × 20m

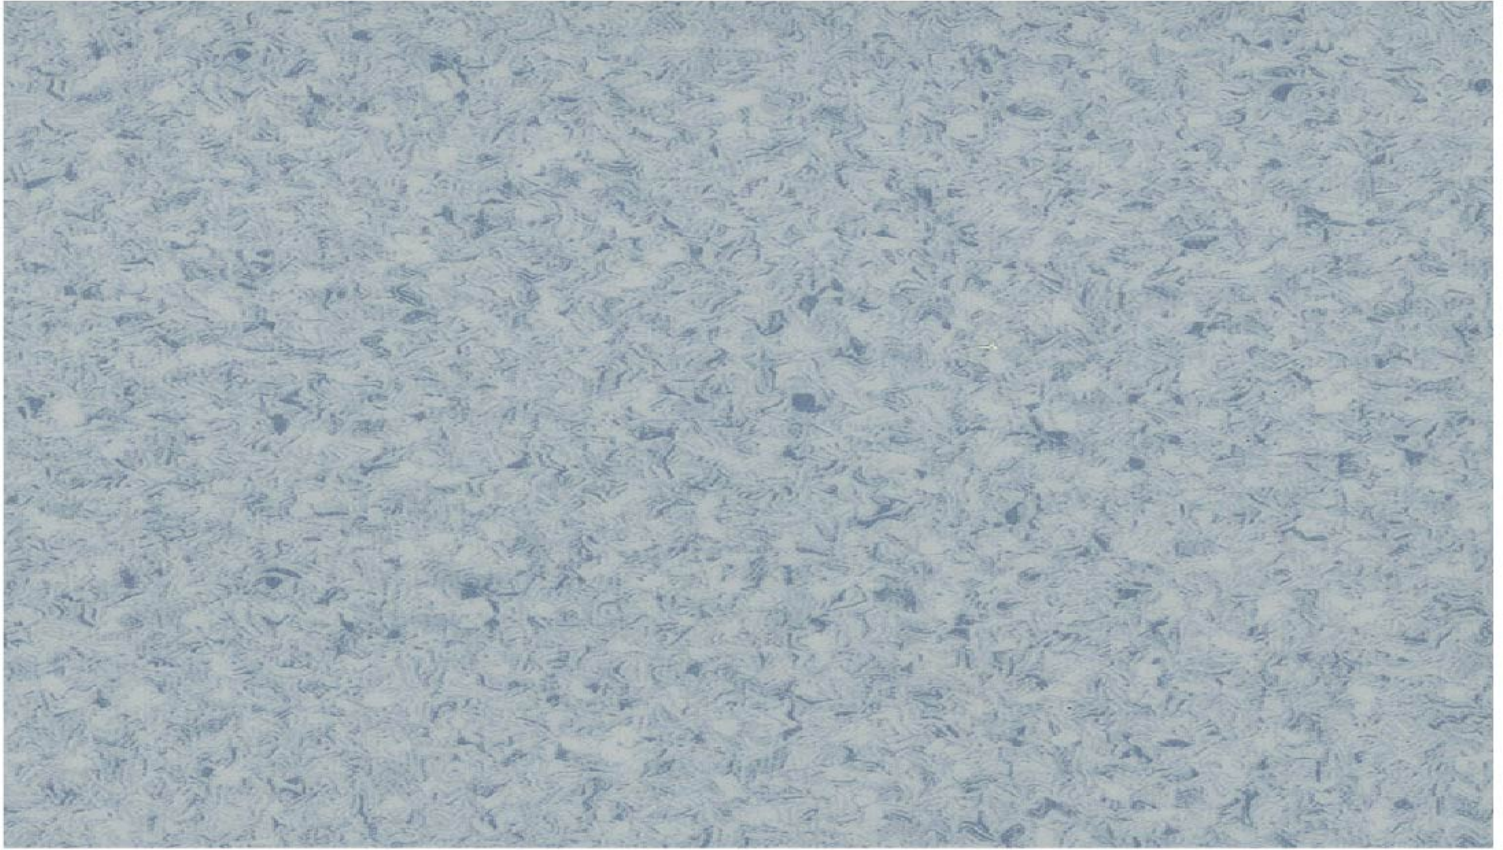

JL03-81




JL03-82

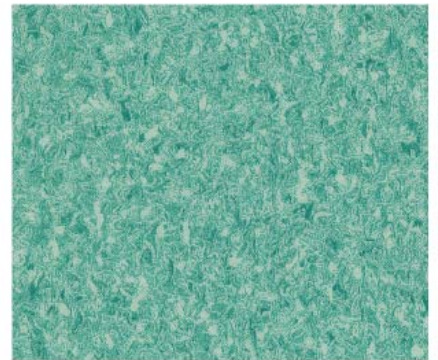


JL03-83



JL03-91

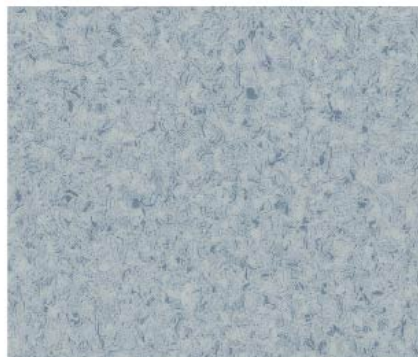

JL03-92

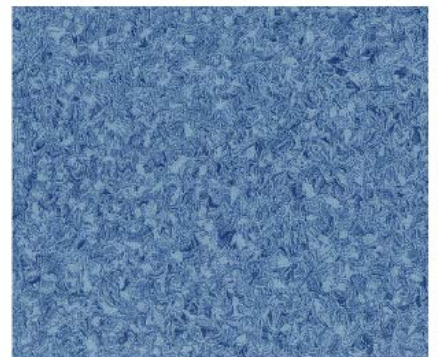

JL03-93



# Dajulong No.3

Dimension: 2.0mm x 2.0m x 20m



JL03-51



JL03-52




JL03-53



JL03-71



JL03-72

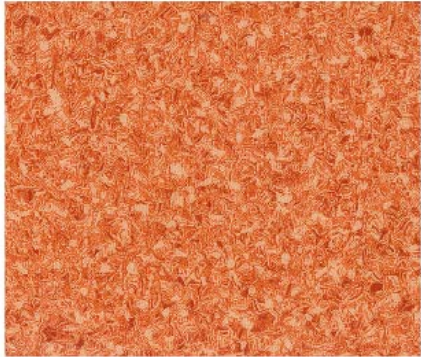

JL03-73




# Dajulong No.3

Dimension: 2.0mm x 2.0m x 20m




*JL03-01*

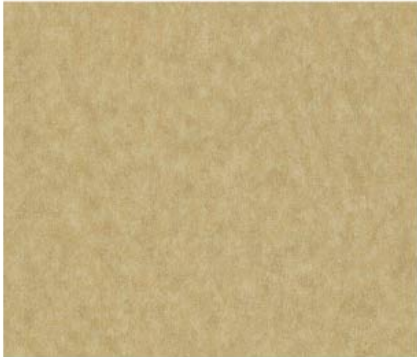

*JL03-02*




*JL03-03*

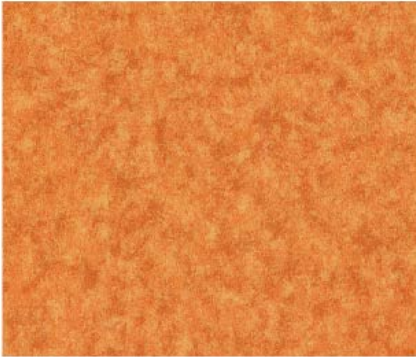

*JL03-21*



*JL03-22*

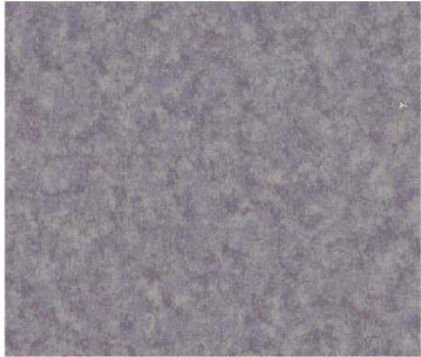


*JL03-23*



# Dajulong No.3

规格: 2.0mm × 2.0m × 20m

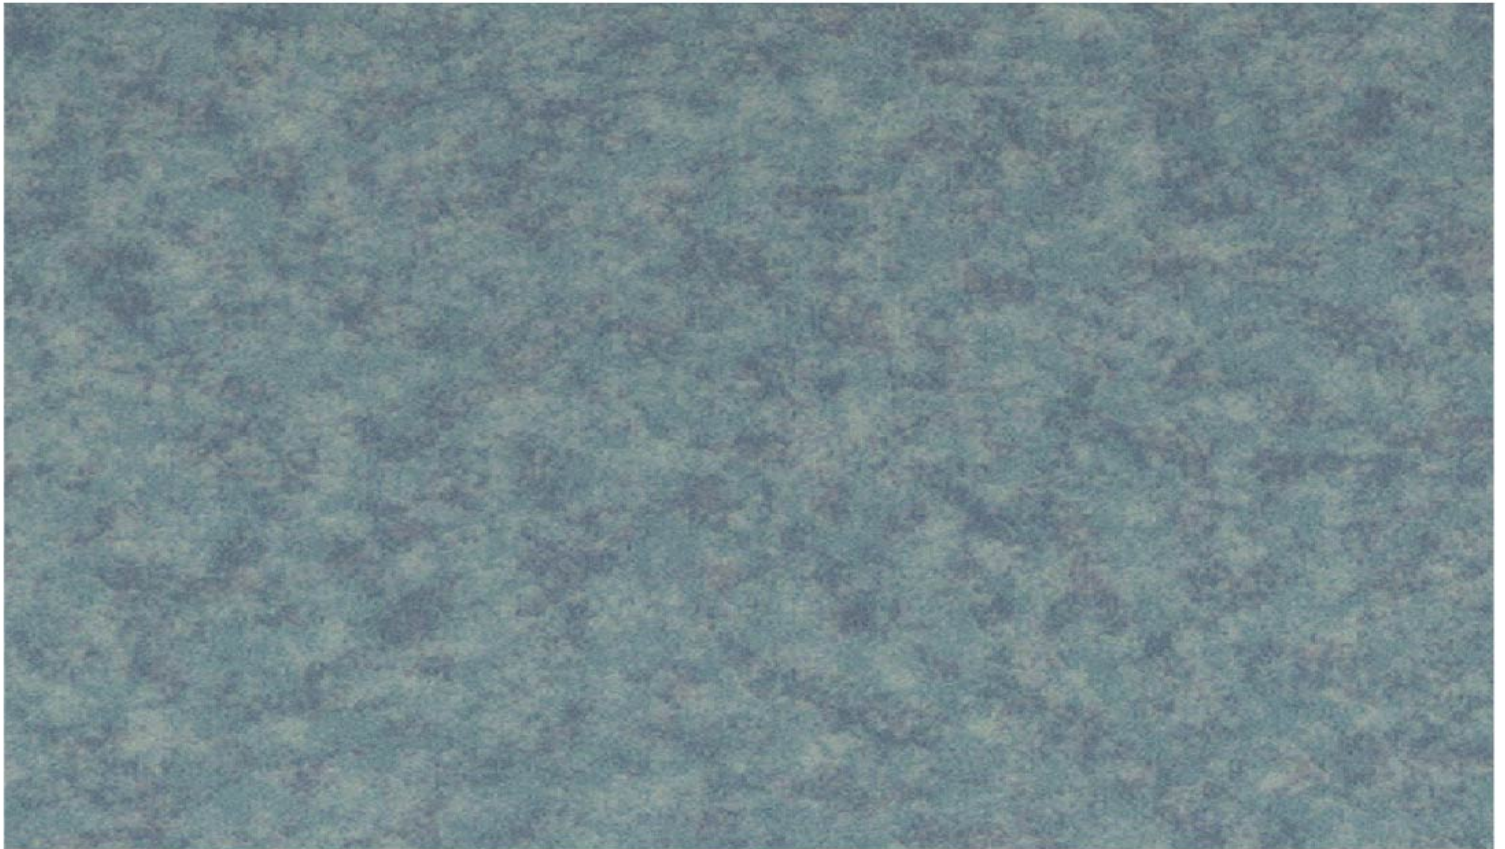

*JL03-31*



*JL03-32*



*JL03-33*



*JL03-41*



*JL03-42*



*JL03-43*



# Dajulong No.3

规格: 2.0mm × 2.0m × 20m



JL03-61



JL03-62



JL03-63



JL03-64



JL03-65



JL03-66



# Dajulong No.3

规格: 2.0mm × 2.0m × 20m



JL03-11



JL03-12



JL03-13



JL03-14



JL03-15



JL03-16

# Dajulong No.3

## 复合商用卷材地板



Description 规格	Standard 标准	Result 结果
Total thickness 总厚度	EN 428	2.0 mm
Wear layer thickness 耐磨层	EN 429	0.35 mm
Width 宽度	EN 426	2 m
Length of sheet 卷长	EN 426	20 m

### CLASSIFICATION 类别

Fire rating 防火等级	GB 8624-2012	B1
Toxic testing 有害物质检测	GB 18586-2001	Good 合格
Electrical resistance 抗电阻性	EN 1081	> 10 <sup>9</sup> 10
Slip resistance dry 防干滑性	EN 13893	≥ 0.3
Slip resistance wet 防湿滑性	EN 51 130	R9

### PERFORMANCES 性能

Castor chair test 轮压测试	EN 425	No damage 合格
Colour fastness 颜色稳定性	EN ISO 105 - B02	≥ 6
Chemical products resistance 抗化学性	EN 423	Good 好
Dimensional stability 尺寸稳定性	EN 434	≤ 0.40%
Curl resultant to heat 加热翘曲	EN 434	≤ 1 mm
Sound reduction 消音率	EN ISO 717/2	Approx. 4 dB
Residual indentation 残余凹陷度	EN 433	0.03 mm
Anti-bacterial and fungicidal 抗菌防霉性能		Good 好
VOC 挥发物排放量		< 10
Surface treatment 表面处理		PUR

#### Intertek 抗菌检测报告



#### FloorScore 环保检测报告



#### SGS 防火检测报告

